



Anel Pré-Isolado 35 - 95 mm²


Corrente Máxima:

170 Amp
 230 Amp
 265 Amp
 310 Amp

Voltagem Máxima: 105°C 600 Volts

Isolação: PVC

Cobre Eletrolítico 99,95%



PRÉ-ISOLADO - RV

NÃO-ISOLADO - RN

Bitola mm ²	Código	Furo		Dimensões			Alicate para Crimpagem
		D2		W	L	L1	
35 mm ²	RVB38-5	#10	5,30	15,3	52,0	44,4	Pré-isolado: OT-AA-35C Sem-isolação: OT-AA-35C KH-150 KH-230
	RVBS38-6	1/4	6,50	15,0	48,6	41,0	
	RVBS38-8	5/16	8,40	16,0	48,6	41,0	
	RVBS38-10	3/8	10,5	18,0	49,6	42,0	
	RVBL38-12	1/2	13,0	22,0	54,0	46,0	
50 mm ²	DRNYB50-6	#8	6,50	18,0	55,1	47,5	
	DRNYB50-8	5/16	8,40	18,0	55,5	47,5	
	DRNYB50-10	3/8	10,5	18,0	55,5	47,5	
	DRNYB50-12	1/2	13,0	22,0	60,3	49,5	
70 mm ²	DRNYB70-6	1/4	6,50	22,0	58,6	51,0	
	DRNYB70-8	5/16	8,40	22,0	59,0	51,0	
	DRNYB70-10	3/8	10,5	22,0	59,0	51,0	
	DRNYB70-12	1/2	13,0	22,0	61,8	51,0	
95 mm ²	DRNYB95-8	5/16	8,40	24,0	65,5	57,5	
	DRNYB95-10	3/8	10,5	24,0	65,5	57,5	
	DRNYB95-12	1/2	13,0	24,0	68,3	57,5	

*Acima de 50 mm² Isolação em NYLON

RVBS38-6
RNBL38-6




RVBS38-8
RNBS38-8



RVBL38-12
RNBL38-12



DRNYB50-8

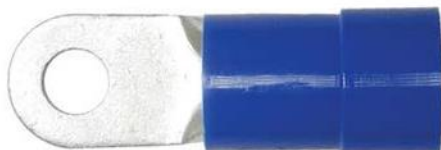

DRNYB95-8



DRNYB70-10



* Tamanho na proporção 1:1