

Anel Pré-Isolado 16 - 25 mm²

Corrente Máxima:

 95 Amp

 125 Amp

Voltagem Máxima:


105°C 600 Volts

Isolação:

PVC

Cobre Eletrolítico

99,95%

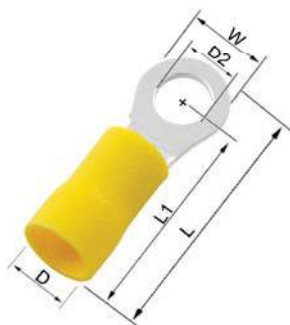

Bitola mm ²	Código	Furo		Dimensões			Alicate para Crimpagem
		D2		W	L	L1	
16 mm ²	RVB14-5	#10	5,30	11,0	37,5	31,5	Pré-isolado: OT-FN-18C OT-AA-35C
16 mm ²	RVBS14-6	1/4	6,50	11,0	37,5	31,5	
16 mm ²	RVB14-8	5/16	8,40	14,0	41,5	33,5	
16 mm ²	RVB14-10	3/8	10,5	16,0	44,7	36,7	
25 mm ²	RVBL22-5	#10	5,30	12,0	46,0	38,0	Sem-isolação: OT-BN-16 OT-AA-35C KH-150 KH-230
25 mm ²	RVBL22-6	1/4	6,50	12,0	46,0	38,0	
25 mm ²	RVB22-8	5/16	8,40	16,0	46,0	38,0	
25 mm ²	RVB22-10	3/8	10,5	18,0	47,0	39,0	
25 mm ²	RVB22-12	1/2	12,0	22,0	54,5	43,7	

PRÉ-ISOLADO - RV

NÃO-ISOLADO - RN

RVB14-5
RNB14-5



RVBS14-6
RNB14-6



RVB14-8
RNB14-8



RVB14-10
RNB14-10




RVBL22-5
RNBL22-5



RVBL22-6
RNBL22-6



RVB22-8
RNB22-8

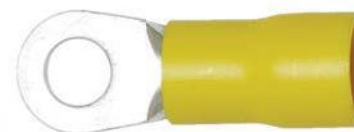

RVB22-10
RNB22-10



RVB22-12
RNB22-12

